



Instaband

Skid Resistant Overbanding Tape

Applications

Ultracrete Instaband is a skid resistant overbanding tape specifically designed for application to asphalt or macadam to prevent water ingress and further fretting. The polymer modified bituminous tape can be used in addition to the Ultracrete BBA/HAPAS Approved Ironwork Reinstatement System or be applied on its own for the sealing of reinstatement joints and general cracks up to 5mm wide.

Technical

Ultracrete Instaband is 40mm wide and 3mm thick and has a unique rubber textured surface produced from recycled tyres. Ultracrete Instaband has been independently tested and proven to exceed the minimum skid resistance value of 55, as specified by the Specification for the Reinstatement of Openings in Highways. The minimum application temperature is 8°C.

Preparation

Remove all dirt and debris from joints and the surrounding area. Ensure that the surface is dry and free from oil, grease and salt residue. If necessary, use a gas burner to dry the surface and the surrounding area. The road surface should be pre-heated immediately prior to application of the overbanding tape Ultracrete Instaband to ensure that a secure bond is rapidly formed.

Application

With the textured side up, apply Ultracrete Instaband by hand following the line of the joint or crack; the tape should be applied using the textured side up. Peel off the recycled paper backing carefully as the application to the joint progresses. A butted joint should be formed with the tape at the corners. Do not overlap joints. Immediately trim back any surplus material using a sharp safety knife. Firmly press down to ensure good adhesion with the road surface. Do not apply the gas burner to the surface of the tape itself.


Health & Safety

Always use protective gloves and avoid direct contact with the skin. In case of contact with skin wash thoroughly with soap and water. For a full updated material safety data sheet please visit www.instarmac.co.uk



Features & Benefits

- Conforms to the Specification for the Reinstatement of Openings in Highways
- Clean and easy to use, fast installation.
- Simple and economical to apply.
- Prevents water ingress instantly.
- Skid resistant, trafficked immediately.
- Elastic properties accommodate thermal movement.
- Environmentally friendly – contains recycled tyres and paper.
- Suitable for footpaths, cycle tracks and class 2, 3 & 4 carriageways

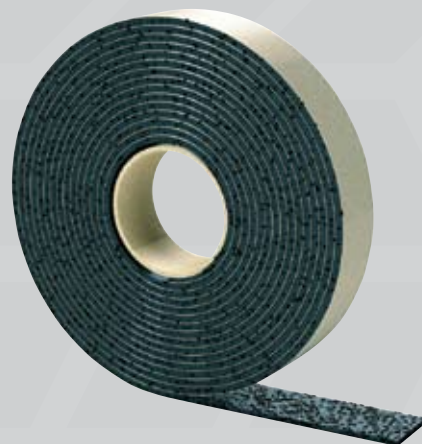

Related Products

- Ultracrete **Envirobed HA104**® High Performance Bedding Mortar
- Ultracrete **PY4** Polyester Resin Fast Setting Bedding Mortar
- Ultracrete **M60** Rapid Strength Bedding Mortar
- Ultracrete **QC10** Fast Set Rapid Strength Concrete
- Ultracrete **SCJ** Spray Applied Bitumen Cold Joint Sealer
- Ultracrete **IRR** Cold Lay Macadam

continued



Instaband

Skid Resistant Overbanding Tape

Product Details

| | |
|----------------|--|
| Unit/Packaging | 10 metres x 40mm rolls, 8 rolls per box |
| Storage | Store in a dry place at temperatures between 2°-30°C. Keep away from heat, sparks and open flame |
| Shelf Life | Shelf life in correct conditions for sealed packaging is 6 months. In cold weather conditions application will be assisted by storing tape overnight at room temperature |
| Colour | Black |

Contact Us

Instarmac® Group plc, Birch Coppice Business Park, Danny Morson Way, Dordon, Tamworth, Staffordshire, B78 1SE, United Kingdom

Tel: +44 (0) 1827 872244 Fax: +44 (0) 1827 874466

Email: email@instarmac.co.uk Order: orders@instarmac.co.uk Website: www.instarmac.co.uk

Ultracrete products are guaranteed against defective materials and manufacture, and will be replaced or money refunded if the goods do not comply with our promotional literature. We cannot however accept any liability arising from the application or use of our products because we have no direct or continuous control over where and how our products are used. All products are sold subject to our conditions of sale, copies of which may be obtained on request.

An **INSTARMAC®** Brand